

JETBOOK C240




For more information, please visit
[HTTP://WWW.NNERVISIONPC.COM](http://www.nnervisionpc.com)

Intel® Centrino™ Technology

Unwire

In addition to the newest Intel 915 mobile technologies, the new Jetbook C240 were painted with eye catching colors. The shiny premium pearl white with a marble swirled paint on the aluminum case exemplify the outstanding quality and attention to detail of this new Jetbook.

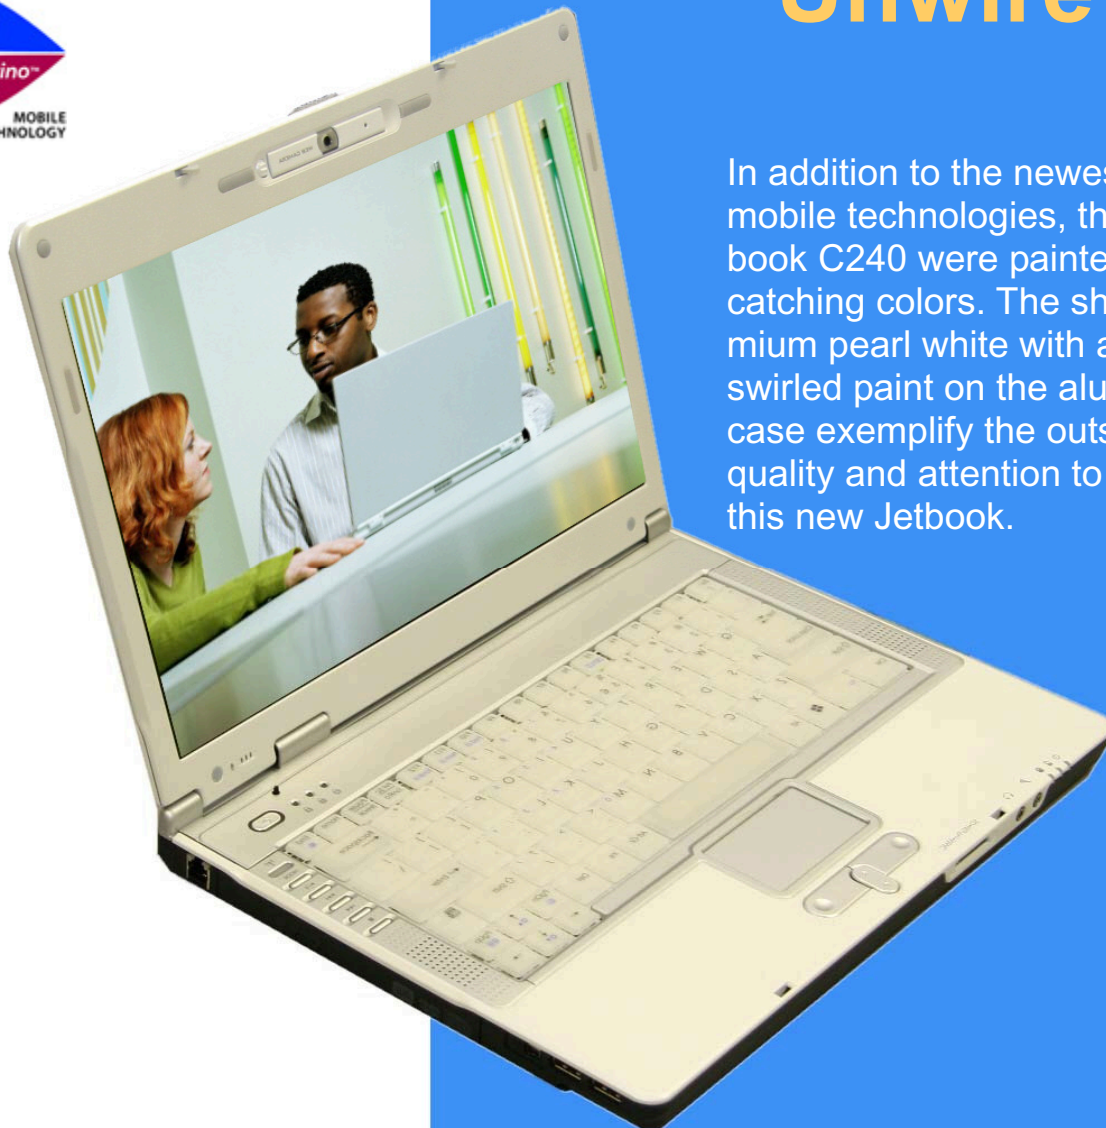

Featuring Intel® New Centrino™ 533MHz Technology

- Intel (R) 915PM Mobile Chipset
- nVidia NV44M dedicated 64MB VGA graphic
- 14.1" WXGA 1280x768 resolution
- MMC, SD/SD IO, MS/MS PRO, XD 4-in-1 card reader
- Intel (R) A+G Wireless LAN
- Built-in Web Camera, only 1" thin 4.95lb

JETBOOK C240 Limited Edition

CPU

Intel Dothan Pentium M or Celeron-M processor up to FSB 533MHz
Intel Pentium M up to 2.13GHz

Chipset

Intel 915PM with discrete VGA chip

Memory

One user configurable DDR 1 SODIMM slot.
256MB on board, Max support 1280MB.
333 MHz DDR1 DRAM memory module

Display

1280x768 (15:9) for 14" WXGA TFT LCD

HDD

9.5mm, 2.5" HDD support, ATA/100 support

Optical Drives

12.7 mm, ODD drive, factory configurable

USB FDD

Optional external USB FDD

Video chip

nVidia NV44M dedicated 64MB graphic

Audio

Realtek ALC250
MS sound System compatible
Two 1.0W speakers
Microphone-in and headphone-out
Build in microphone.

PCMCIA

ENE CB714 PCI Cardbus controller
PC Card 95 supported with one type II card sockets
No ZV port supported

Media card slot

Support MMC, SD/SD IO, MS/MS PRO, XD 4-in-1 card reader.

Communication

AC97 modem via MOM that is V.92/56K bps data and 14.4Kbps
send/receive Fax
On-board 10/100 LAN
TI TSB-43-AB21A IEEE1394
Build in antenna on top of panel side for 802.11a/b/g module

Mini-PCI slot

Internal Intel 802.11 a/b/g Wireless LAN if purchase with Centrino
logo

Keyboard

Full size keyboard with localization, 85 keys layouts for US
19.05 mm key pitch, 2.5 mm travel length, 5.3mm thickness.
Support window, application key

Pointing device

mini-wide Touch pad with scroll up/down button

I/O ports

Four USB ports
One VGA port
One TV out

One RJ-11

One RJ-45

One IEEE1394

One Microphone-in jack

One Headphone-out jack

One DC input jack

One Kensington lock

One built-in 300K pixels CMOS camera on top of the display

User keys

2 user programming short cut key (Shared with SW DJ buttons)

Button Controls

Power button and cover switch

5 SW DJ buttons for On/Off, Play, Stop, Forward, Backward.

One for WLAN

AC Adapter

65W, AC Adapter. 90-264VAC, 47-63HZ, 3-pin AC input

Battery

Standard with 6-cell 18650 Li-Ion battery pack

Approximate 3 hours operating time for 6-cell battery

Software

Insyde BIOS

512KB Flash BIOS ROM

Suspend to RAM/Disk

Various hot-keys for system control

ACPI compliant BIOS

SMBIOS2.3

BIOS boot block protection

Support boot from CD (CD, NIC and HDD)

Operating System

Windows XP professional/home, SP2 version

PC2001 compatible

Regulatory

FCC part 15 (EMI - for intentional and unintentional radiators)

CUL/us (UL 1950/safety)

FCC part 68(Telecom)

Environment

Temperature: (operation 5-35C, Non operation -20-65C)

Dimension

333 mm x 240.5 mm x 25.4 mm front/28.5 rear mm.

13" x 9.5" x 1" front /1.1" rear

Weight

4.95lbs (2.27kg) (with 14" panel/Combo/ HDD/6 cells Li-Ion battery
pack).